


A2K-4WT


4 Way Multidrop T Piece

The Actisense NMEA 2000® 4 Way Multidrop T Piece is for use where a multiple drop or 'ports' are required from the NMEA 2000® backbone to connect other devices.

With five female and one male connector, the A2K-4WT can be easily connected to Actisense NMEA 2000® micro cable assemblies, available in various lengths with UL certified cable for unbeatable quality.

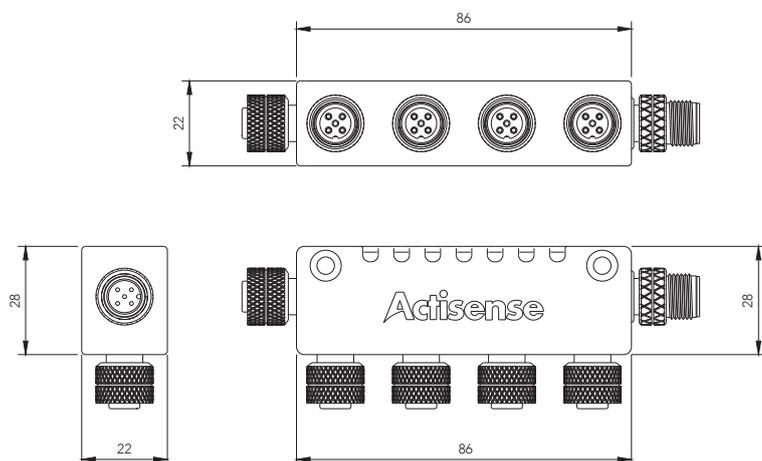

Colour	Pin	Name
Bare/Green	1	Shield
Red	2	NET-S
Black	3	NET-C
White	4	NET-H
Blue	5	NET-L

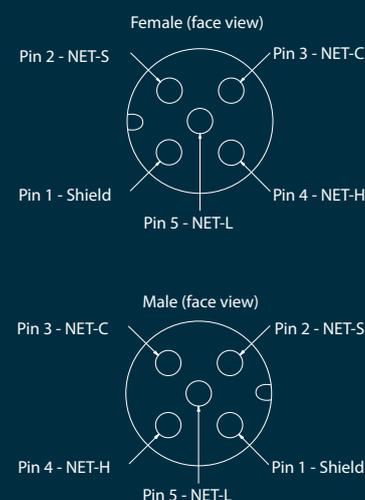

Mechanical	
Male Contact	Brass, gold plated
Female Contact	Phosphor bronze, gold plated
Contact Carrier	PA66 (30% Glass filled), black
Contact Polarisation	Standard M12 -"A"- polarisation
Mating Thread	M12
Screw Cap	Brass, nickel plated
O-Ring Seal	Rubber, Black
Housing	TPU, flame retardant to UL94V-0, Halogen Free
Internal Housing Shield	Copper Foil
Weight	105g

Electrical	
Rated Current	4A
Rated Voltage	60V DC
Approvals and Certifications	
NMEA 2000 Approved	
RoHS Compliant	
Protection	IP67 (when mated)
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C