



## A2K-T-MFF



### T Piece (Micro)

The Actisense NMEA 2000 T piece is for use where a drop or 'port' is required from the NMEA 2000 backbone to connect another device.

The quality engineered connectors are shaped to allow easy and secure connections, with two female and one male connector, even when field fit connectors are used, making it a totally unique T piece.

With two female and one male connector, the A2K-T-MFF can be easily connected to NMEA 2000 micro cable assemblies.

Colour		Name
Bare/Green		Shield
Red		NET-S
		NET-C
White		NET-H
Blue		NET-L

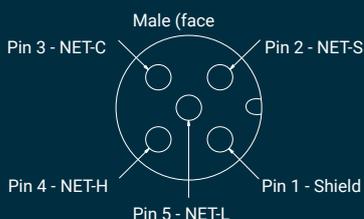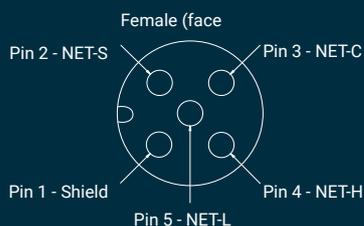

Electrical	
Rated Current	4A
Rated Voltage	60VDC
Mechanical	
Male Contact	Brass, gold plated
Female Contact	Phosphor bronze, gold plated
Contact Carrier	PA66 (30% Glass filled), black
Contact Polarisation	Standard M12 - "A" - polarisation
Mating Thread	M12
Screw Cap	Brass, nickel plated
O-Ring Seal	Rubber, black
Housing	PVC, black
Weight	47g
Approvals and Certifications	
NMEA 2000 Approved	
RoHS Compliant	
UL Certified (UL1277)	
Protection	IP67 (when mated)
Operating Temperature	-25°C to +70°C
Storage Temperature	-40°C to +80°C

### Product Dimensions.

